

PRODUCT CODE

2337


LIFTEK[®]
SUPPLIED BY **SHS**
DRIVERTRUK30

ELECTRIC
PALLET TRUCK

1500 KG



- ☑ Smart Lithium Battery
- ☑ Now With Electric Lift
- ☑ Newly Designed Handle Head Turtle
- ☑ Speed for Upright Handling Battery
- ☑ Lock

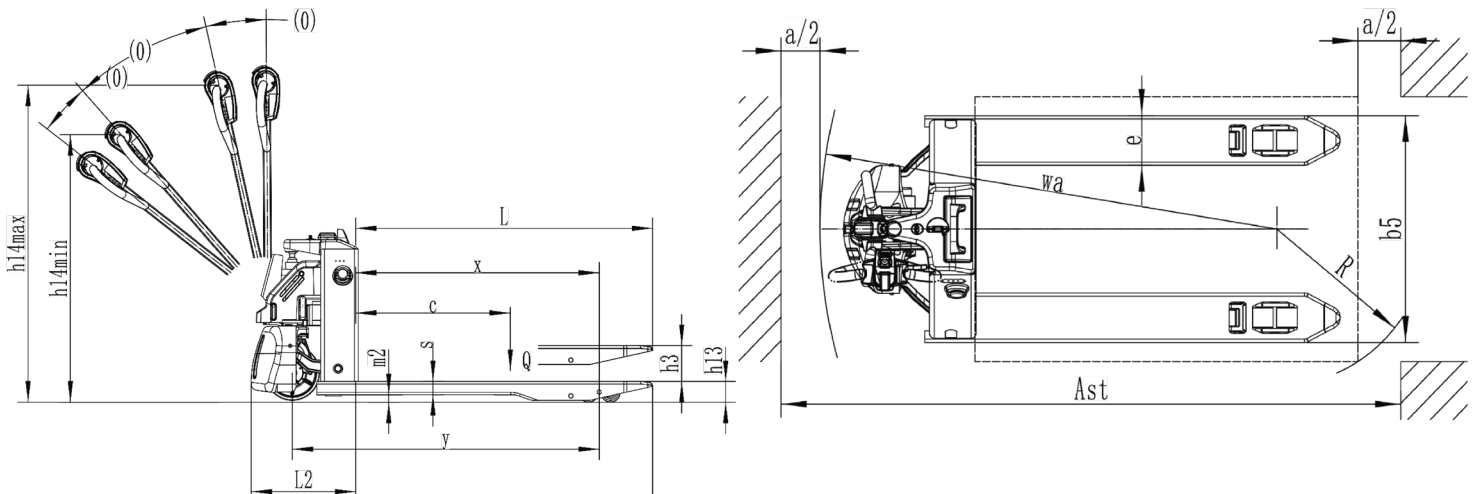

SEE TABLE OVER FOR IMAGE DATA

SHS
HANDLING SOLUTIONS

☎ 0800 619 0800
✉ SALES@SHS-HANDLING.COM

SHSHANDLING
SOLUTIONS
.COM

📍 SHS HANDLING SOLUTIONS LTD, ELEVATION HOUSE, UNIT C,
TINGEWICK ROAD INDUSTRIAL PARK, BUCKINGHAM, MK18 1SU

MANUFACTURER'S DATA AND DESIGN CHARACTERISTICS

Characteristics		
Manufacturer		LIFTEK
Model		DriverTruck 30
Type of Operation		Pedestrian
Load Capacity	Q(kg)	1500
Lift Height	h3(mm)	115
Service Weight with Battery	kg	120
Load Centre	c(mm)	600
Axel Centre to fork face	Ximm	950 (880)
Wheel Base	y(mm)	1190 (1120)
Wheel		
Wheels Type		Polyurethane
Driving Wheels Size	Φx w(mm)	Φ 210x70
Loading Wheels Size	Φx w(mm)	Φ 80x60
Wheels, Number Front/Rear (x=driven)		1x/4 (1x/2)
Track Width, Rear, Loading Side	b11(mm)	410/535
Dimensions		
Overall Length	l1mm	1540
Length to Fork Face	l2(mm)	400
Overall Width	b1(mm)	560/685
Fork Dimensions	s/el(mm)	50/150/1150
Width of Fork	b5(mm)	560/685
Lower Height	h13(mm)	80
Min. Ground Clearance	m2(mm)	30
Height Drawbar in Driving Position min. /max.	h14(mm)	720/1090
Aisle Width with Pallet 1000 x 1200 across forks	Ast(mm)	2145
Aisle Width with Pallet 800 x 1200 along forks	Astimm	2050
Min. Turning Radius	Wa(mm)	1330
Performance		
Travel Speed, with/without load	km/h	4.5/5.0
Max. Gradeability laden/unladen	(%)	6/16
Service Brake Type		Electromagnetic Brake
Drive and Battery		
Drive motor, output s2 60 min.	kW	0.75
Lift Motor rating at s3 15%	kW	0.7
Battery According to din 43531/35/36 a,b,c, no		no
Batter Voltage/Rated Capacity	V/Ah	24/20
Battery Weight (± 5%)	kg	7
Others		
Type of Drive Control		DC
Sound Pressure Level at Driver's Ear	dB(A)	≤74
Steering Type		Mechanical Steering

AT SHS, WE HELP COMPANIES MOVE GOODS SAFELY AND EFFICIENTLY BY DESIGNING, SUPPLYING, AND MAINTAINING MATERIALS HANDLING EQUIPMENT.