

PRODUCT CODE

2345


LIFTEK[®]
SUPPLIED BY **SHS**
POWERRIDE2000+

FULLY-ELECTRIC
PALLET TRUCK

2000 KG



- ✓ Reliable drive system with high performance and stable operation
- ✓ High strength vertical gear box with good durability
- ✓ Operation safety assurance
- ✓ Easy operation with easy-trigger pedal and side leaning driving mode

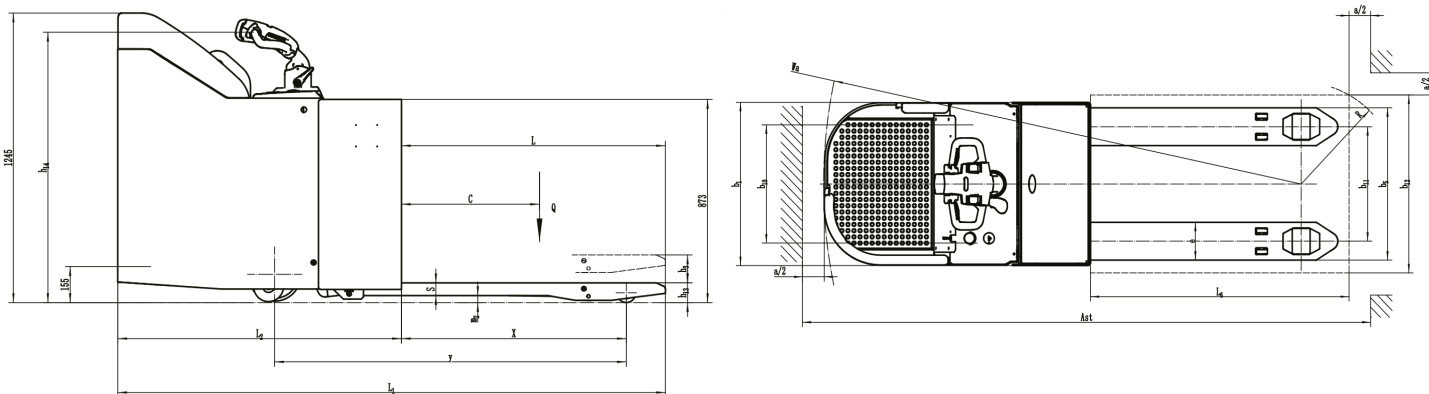

SEE TABLE OVER FOR IMAGE DATA

SHS
HANDLING SOLUTIONS

0800 619 0800
SALES@SHS-HANDLING.COM

SHSHANDLING
SOLUTIONS
.COM

SHS HANDLING SOLUTIONS LTD, ELEVATION HOUSE, UNIT C,
TINGEWICK ROAD INDUSTRIAL PARK, BUCKINGHAM, MK18 1SU

MANUFACTURER'S DATA AND DESIGN CHARACTERISTICS

Characteristics			
Manufacturer		LIFTEK	LIFTEK
Model		LTEPKPL201150 (Li-ion)	LTEPKPL201150(Acid)
Type of Operation		Pedestrian	Pedestrian
Load Capacity	Q(kg)	2000	2000
Lift Height	h3(mm)	125	125
Service Weight with Battery	kg	1760	1890
Load Centre	c(mm)	765	838
Axel Centre to fork face	Ximm)	977	977
Wheel Base	y(mm)	1529	1529
Wheel			
Wheels Type		Polyurethane	Polyurethane
Driving Wheels Size	Φx w(mm)	Φ 230x75	Φ 230x75
Loading Wheels Size	Φx w(mm)	Φ 85X70	Φ 85x70
Wheels, Number Front/Rear (x=driven)		1x+2/4	1x+2/4
Track Width, Rear, Loading Side	b11(mm)	515	515
Dimensions			
Overall Length	l1mm	2381	2381
Length to Fork Face	l2(mm)	1234	1234
Overall Width	b1(mm)	734	734
Fork Dimensions	s/el(mm)	55/170/1150	55/170/1150
Width of Fork	b5(mm)	685	685
Lower Height	h13(mm)	125	125
Min. Ground Clearance	m2(mm)	35	35
Height Drawbar in Driving Position min. /max.	h14(mm)	1154/1254	1154/1254
Aisle Width with Pallet 1000 x 1200 across forks	Ast(mm)	3017	3017
Aisle Width with Pallet 800 x 1200 along forks	Astimm)	2874	2874
Min. Turning Radius	Wa(mm)	2217	2217
Performance			
Travel Speed, with/without load	km/h	8.5/10.0	8.5/10.0
Max. Gradeability laden/unladen	(%)	6/16	6/16
Service Brake Type		Electromagnetic Brake	Electromagnetic Brake
Drive and Battery			
Drive motor, output s2 60 min.	kW	1.6	1.6
Lift Motor rating at s3 15%	kW	2.2	2.2
Battery According to din 43531/35/36 a,b,c, no			
Batter Voltage/Rated Capacity	V/Ah	24/205	24/205
Battery Weight (± 5%)	kg	62	255
Charger Specification			
Others			
Type of Drive Control		AC	AC
Sound Pressure Level at Driver's Ear	dB(A)	74	74
Steering Typev		Electronic Steering	Electronic Steering

AT SHS, WE HELP COMPANIES MOVE GOODS **SAFELY** AND **EFFICIENTLY** BY **DESIGNING, SUPPLYING, AND MAINTAINING** MATERIALS HANDLING EQUIPMENT.