

PRODUCT CODE

2366

LIFTEK®
SUPPLIED BY **SHS**

COUNTER BALANCE
STACKER - LIFTER

3300 MM LIFT HEIGHT

1200KG



The RSC Series is designed for handling a wide variety of pallets, boxes, and cages in warehouses, factories, and distribution centers. Thanks to its counterbalance design, it can lift closed pallets and irregular loads that standard straddle stackers cannot handle. With foldable platform and arm guards, it is also suitable for longer travel distances, while the 116 mm ground clearance ensures smooth operation even on uneven surfaces.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Lead Acid/Li-ion
Battery nominal capacity		Ah	210
Battery voltage		V	24
Load capacity	Q	kg	1200
Load centre distance	c	mm	500
Service weight		kg	1890
Retracted mast height	h ₁	mm	2061
Lift height	h ₃	mm	3000
Height, mast extended	h ₄	mm	3908
Overall length		mm	2668
Overall width	b ₁ /b ₂	mm	900
Length to face of forks	l ₂	mm	1598
Fork dimensions	s/e/l	mm	35×100×1070
Turning radius		Wa	1510
Manufacturer			EP
Model designation			RSC 122

SHS
HANDLING SOLUTIONS

0800 619 0800
SALES@SHS-HANDLING.COM



SHSHANDLING
SOLUTIONS
.COM

SHS HANDLING SOLUTIONS LTD, ELEVATION HOUSE, UNIT C,
TINGEWICK ROAD INDUSTRIAL PARK, BUCKINGHAM, MK18 1SU

FEATURES

UNIVERSAL COUNTERBALANCE DESIGN

- The RSC Series is capable of handling all pallet types, including closed pallets and special load carriers, offering greater flexibility than standard stackers.

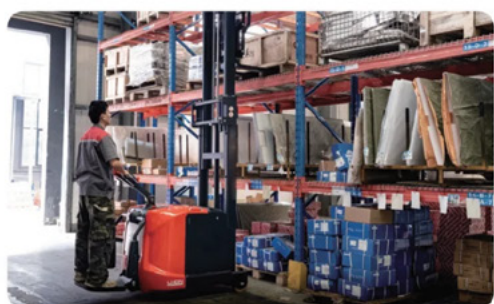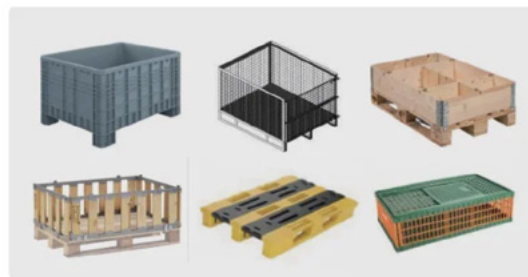

PROPORTIONAL LIFTING SYSTEM

- Standard across the range, the proportional lifting system allows gentle, precise pallet placement in multi-level racking, reducing damage to loads and improving efficiency.

HIGH GROUND CLEARANCE AND MANEUVERABILITY

- With 116 mm ground clearance and compact turning radii (1250 mm for RSC082, 1510 mm for RSC122, and 1707 mm for RSC152), the RSC Series ensures smooth operation on uneven surfaces while remaining agile in confined aisles.



OPERATOR COMFORT AND SAFETY

- Features such as foldable platform, arm guards, electronic steering, and optional add-ons (warning lamps, buzzer, side supports) make the RSC Series safe, user-friendly, and adaptable for longer working hours.





SPECIFICATION

	SPECIFICATION	REF	UNIT	VALUE
1.1	Manufacturer			LIFTEK
1.2	Model designation			RSC 122
1.3	Drive			Electric
1.4	Operator type			Pedestrian
1.5	Load capacity	Q	kg	1200
1.6	Load centre distance	c	mm	500
1.8	Load distance, centre of drive axle to fork		mm	118
1.9	Wheelbase		mm	1074
2.1	Service weight		kg	1890
2.2	Axle loading, laden front/rear		kg	420/2670
2.3	Axle loading, unladen front/rear		kg	1110/780
3.1	Tyre type			Polyurethane
3.2	Tyre size, front		mm	230×90
3.3	Tyre size, rear		mm	180×65
3.5	Wheels, number front/rear (x=drive wheels)			1x,/2
3.6.1	Tread width, front	b ₁₀	mm	\
3.7.1	Tread width, rear	b ₁₁	mm	778
4.0	Max lift height	H	mm	3300
4.1	Tilt of mast/fork carriage forward/backward		°	3/3
4.12	Tow coupling height		mm	\
4.19	Overall length		mm	2668
4.2	Retracted mast height	h ₁	mm	2061
4.20	Length to face of forks	l ₂	mm	1598
4.21	Overall width	b ₁ /b ₂	mm	900
4.22	Fork dimensions	s/e/l	mm	35×100×1070
4.23	A,B Fork carriage class/type A, B			2A
4.24	Fork carriage width		mm	620
4.3	Free lift		mm	\
4.31	Ground clearance, laden, below mast		mm	60
4.32	Ground clearance, centre of wheelbase		mm	116
4.34.1	Aisle width for pallets 1000×1200 crossways		Ast	2979
4.34.2	Aisle width for pallets 800×1200 lengthways		Ast	3088

SPECIFICATION

	SPECIFICATION	REF	UNIT	VALUE
4.35	Turning radius		Wa	1510
4.4	Lift height	h_3	mm	3000
4.5	Height, mast extended	h_4	mm	3908
4.7	Height of overhead guard (cabin)		mm	\
4.8	Seat height/standing height		mm	148
5.1	Travel speed, laden/unladen		km/h	5.5/6
5.10	Service brake			Electromagnetic
5.11	Parking brake			Electromagnetic
5.2	Lifting speed, laden/unladen		m/s	0.13/0.2
5.3	Lowering speed, laden/unladen		m/s	0.16/0.15
5.8	Max. gradeability, laden/unladen		%	3/3
6.1	Drive motor rating S2 60 min		kW	1.6
6.2	Lift motor rating at S3 15%		kW	2.2
6.4	Battery nominal capacity		Ah	210
6.4	Battery voltage		V	24
6.4.1	Battery type			Lead Acid/Li-ion
6.5	Battery weight		kg	190
6.6	Energy consumption according to DIN EN 16796		kWh/h	1.057 ¹⁾
6.7	Turnover output according to VDI 2198			28.8
6.8	Turnover efficiency according to VDI 2198			30.06
8.1	Type of drive control			AC
10.5	Steering design			Electronic
10.7	Sound pressure level at the drivers ear		dB(A)	74
15.1	Charger output current		A	30

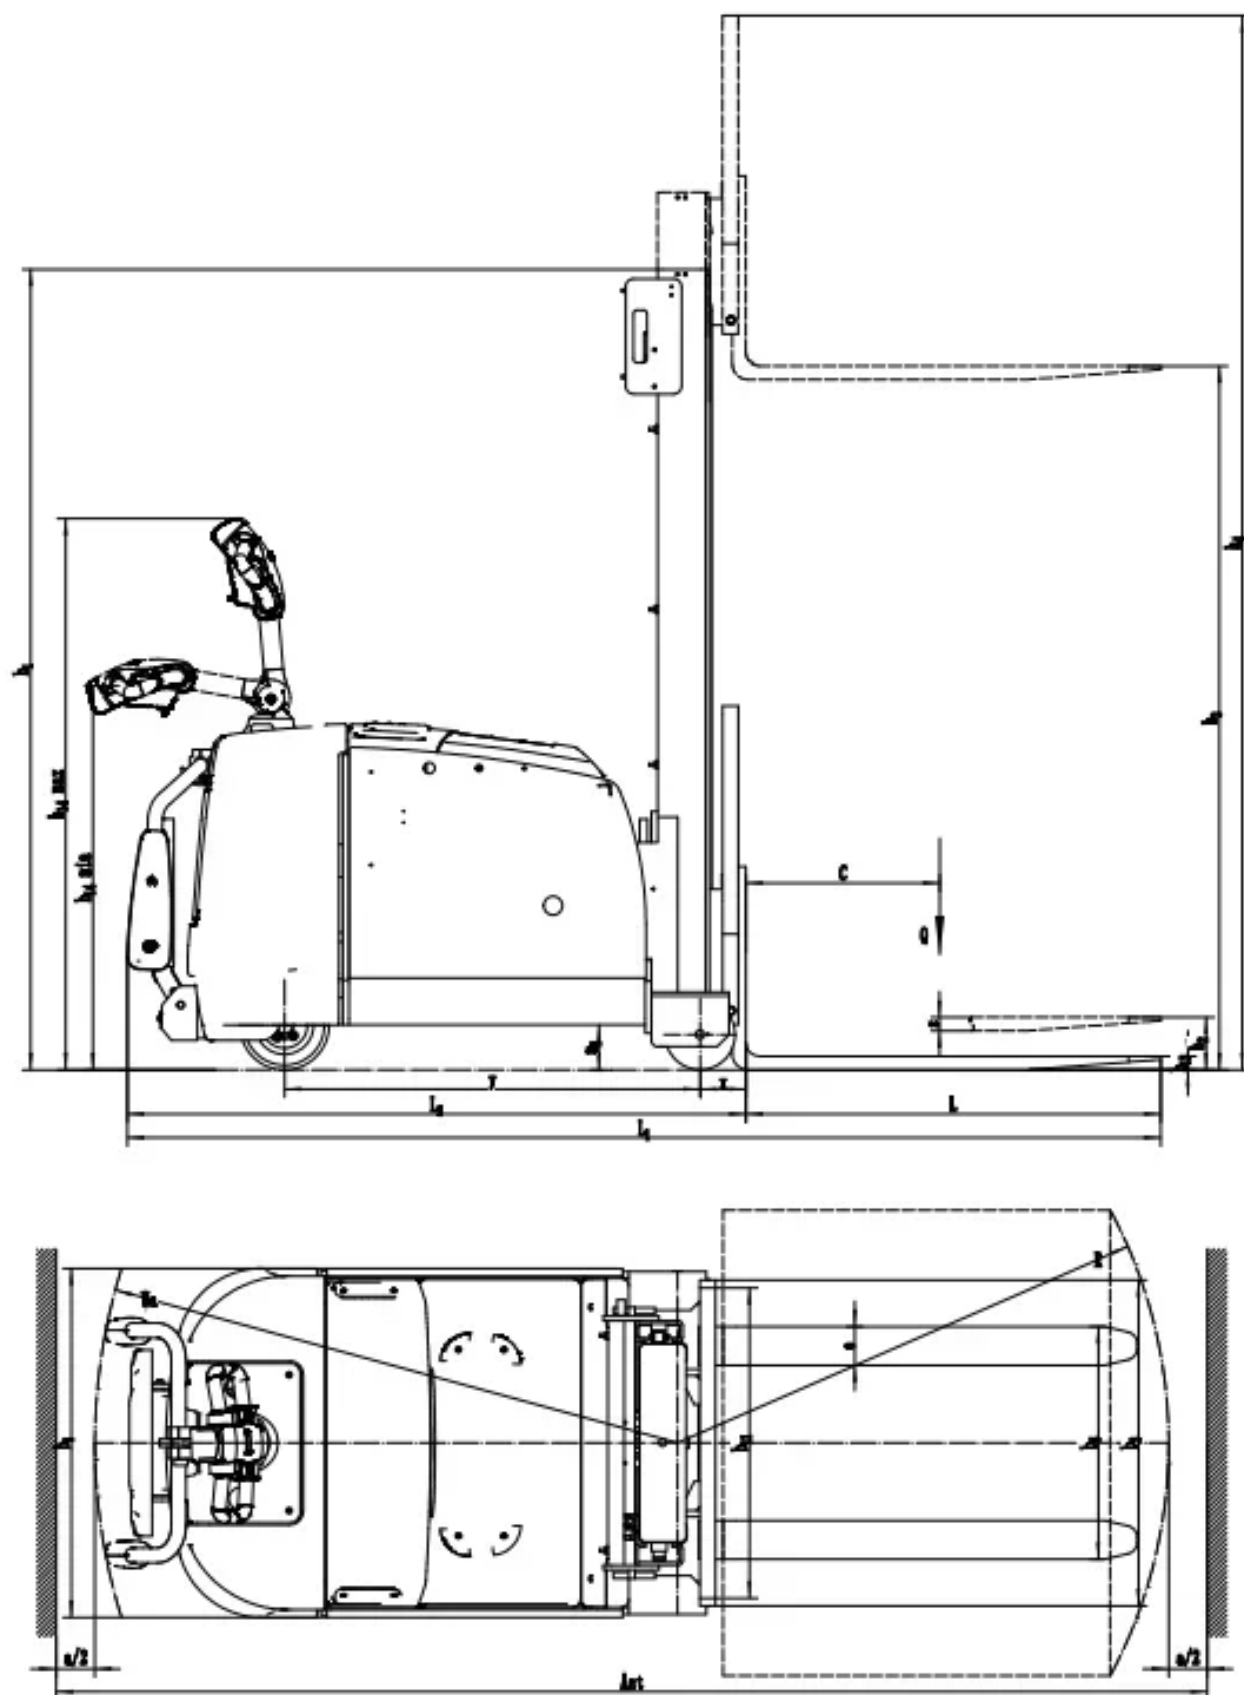

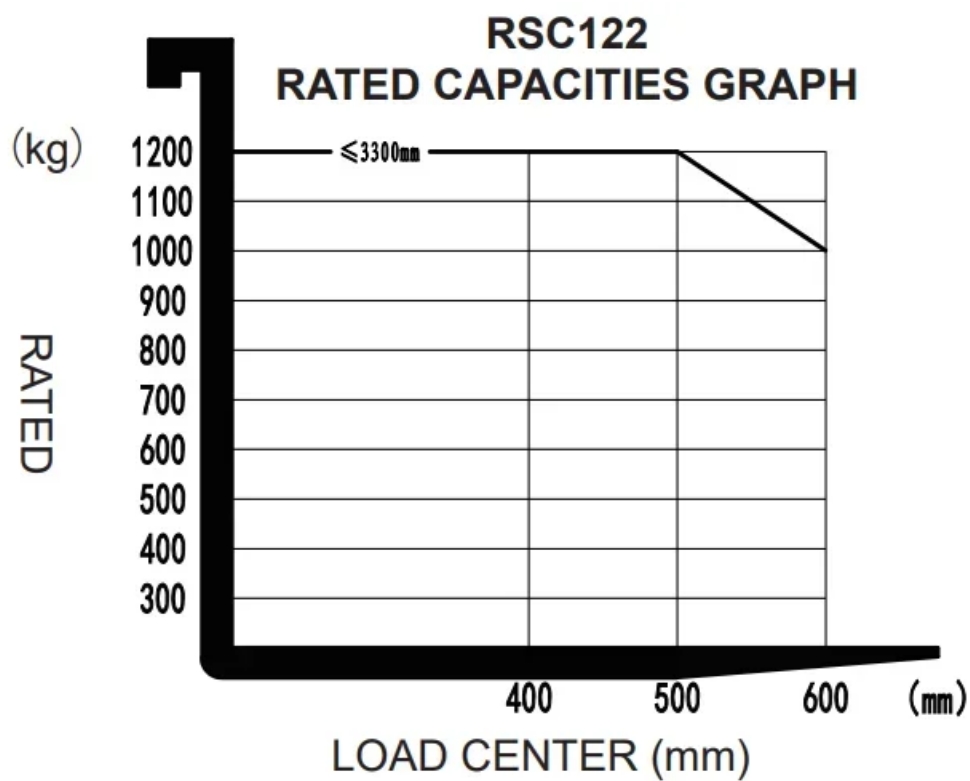

MAST OPTIONS

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)
2-Standard Mast	2000	1561	2546	2908
2-Standard Mast	2500	1811	3046	3408
2-Standard Mast	2700	1911	3246	3608
2-Standard Mast	3000	2061	3546	3908

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	900*600 2A 100*35*1070 900*600 2A 100*35*920 900*600 2A 100*40*1150 900*600 2A 100*40*1220 900*600 2A 100*40*1370 900*600 2A 100*40*1520
Fork lowered height	+0
Fork carriage width option	620
Backrest height	762
Attachments	No
Load wheel material	PU
Drive wheel material	PU
Battery capacity	210Ah 205Ah (Li-ion)
Charger	24V-30A External (Lead Acid) 24V-100A External (Li-ion)
Battery display indicator (BDI)	With hourmeter (Bluetooth)
Area warning lamp	No Yes and not customized
Rearview mirror	No
Buzzer	No Yes and not customized
Telematics	No Yes and not customized
Water auto-filling system	No Yes and not customized
Warning lamp	No Yes and not customized
Blue lamp	No Yes and not customized

AT SHS, WE HELP COMPANIES MOVE GOODS **SAFELY** AND **EFFICIENTLY** BY **DESIGNING, SUPPLYING, AND MAINTAINING** MATERIALS HANDLING EQUIPMENT.