

PRODUCT CODE

26808

LIFTEK®
SUPPLIED BY **SHS**

F4 WITH SCALE

WEIGHING LI-ION
PALLET TRUCK

1500 KG



- ✓ Efficient and effortless tool for checking incoming goods and shipping weights
- ✓ 4 load cells system for high weighing accuracy
- ✓ Display powered through 4 x 1.5V Ah-batteries
- ✓ Long display autonomy through the automatic switch-off

Pallet Truck Information

Manufacturer			LIFTEK
Model designation			F4 with scale
Drive			Electric
Load capacity	Q	kg	1500
Load center distance	c	mm	600
Service weight		kg	155
Length to face of forks	l2	mm	1575
Overall width	b1/b2	mm	425
Fork dimensions	s/e/l	mm	60/155/1150
Turning radius	Wa	mm	1380
Max. gradeability, laden/unladen		%	5/16
Battery voltage/nominal capacity		V/Ah	24/20

Weighing Scale Information

Display digits	n.	5
Digit height	mm	18
Unit measurement selection	(Kg/lb)	Yes
Tare function		Yes
Auto-off function		Yes
Totalization		Yes
Accuracy	%	0.1
Load cells	n.	4
Division	kg	1

SHS
HANDLING SOLUTIONS

☎ 0800 619 0800
✉ SALES@SHS-HANDLING.COM

SHSHANDLING
SOLUTIONS
.COM

📍 SHS HANDLING SOLUTIONS LTD, ELEVATION HOUSE, UNIT C,
TINGEWICK ROAD INDUSTRIAL PARK, BUCKINGHAM, MK18 1SU

WHY F4 WITH SCALE?

■ TIME SAVING AND ACCURACY

The F4 with scale offers the ability to weigh goods accurately on the move, saving time and energy if the weighing station is remote. Precise measurement results also help reduce human error and ensure reliable stock management. This leads to efficiency and productivity boost in the world of logistics and distribution.



■ FLEXIBILITY AND MOBILITY

The operator can obtain weight data anywhere within the warehouse with the help of the F4 with scale, such as at goods receiving or shipping points. The mobile weighing function provides maximum flexibility and eliminates the reliance on fixed weighing stations, saving warehouse space.



■ VERSATILE FOR DIVERSE APPLICATIONS

F4 brings maximum flexibility in configurations for every application, from occasional usage to heavy duty. Featuring a two power slot design, F4 offers the option of two 24V/20Ah batteries to maximize uptime for full-time applications. The standard single-battery setting comes with a portable storage container to keep everything easily accessible on the go. Its versatility makes it perfect for diverse tasks in the most cost effective way.



Battery option



Stablizing wheel option





WEIGHING LI-ION PALLET TRUCK 1500KG F4

Underscheidingseken	1.1	Manufacturer			LIFTEK
	1.2	Model designation			F4 with scale
	1.3	Drive			Electric
	1.4	Operator type			Pedestrian
	1.5	Load capacity	Q	kg	1500
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	955
	1.9	Wheelbase	y	mm	1215
	2.1	Service weight		kg	155
Service weight	2.2	Axle loading, laden front/rear		kg	527/1128
	2.3	Axle loading, unladen front/rear		kg	116/39
	3.1	Tyre type			Polyurethane
Tyres/chassis	3.2	Tyre size, front			210x70
	3.3	Tyre size, rear			Φ80x60(Φ74x88)
	3.4	Additional wheels (castor wheels)		mm	Φ74x30 Optional
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x 2/4 (1x 2/2)
	3.6.1	Tread width, front	b ₁₀	mm	—
	3.7.1	Tread width, rear	b ₁₁	mm	530/405
	4.4	Lift height	h ₃	mm	105
Dimensions	4.9	Height of tiller handle in drive position min./max.	h ₁₄	mm	750/1190
	4.15	Lowered height	h ₁₃	mm	82
	4.19	Overall length	l ₁	mm	1575
	4.20	Length to face of forks	l ₂	mm	425
	4.21	Overall width	b ₁ /b ₂	mm	695/590
	4.22	Fork dimensions	s×e×l	mm	60/155/1150
	4.25	Distance between fork-arms	b ₅	mm	685/560
	4.32	Ground clearance, center of wheelbase	m ₂	mm	25
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2190
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	2055
	4.35	Turning radius	Wa	mm	1380
	5.1	Travel speed, laden/unladen		km/h	4/4.5
	5.2	Lifting speed, laden/unladen		m/s	0.017/0.023
Performance data	5.3	Lowering speed, laden/unladen		m/s	0.035/0.053
	5.8	Max. gradeability, laden/unladen		%	5/16
	5.10	Service brake			Electromagnetic
	6.1	Drive motor rating S2 60 min		kW	0.75
Electric-engine	6.2	Lift motor rating at S3 15%		kW	0.5
	6.4	Battery voltage/nominal capacity		V/Ah	24/20
	6.5	Battery weight		kg	5
	6.6	Energy consumption values, based on DIN EN 16796		kWh/h	0.124
	6.7	Transhipments, based on VDI 2198		t/h	58.5
	6.8	Transhipment efficiency, based on VDI 2198		t/kWh	471.77
Addition data	8.1	Type of drive control			DC
	10.5	Steering design			Mechanical
	10.7	Sound pressure level at the driver's ear		dB(A)	74
	15.1	Charger output current		A	—

Weighing Scale Information	Display digits	n.	5
	Digit height	mm	18
	Unit measurement selection	(Kg/lb)	Yes
	Tare function		Yes
	Auto-off function		Yes
	Totalization		Yes
	Accuracy	%	0.1
	Load cells	n.	4
	Division	Kg	1

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

WEIGHING LI-ION PALLET TRUCK 1500KG F4

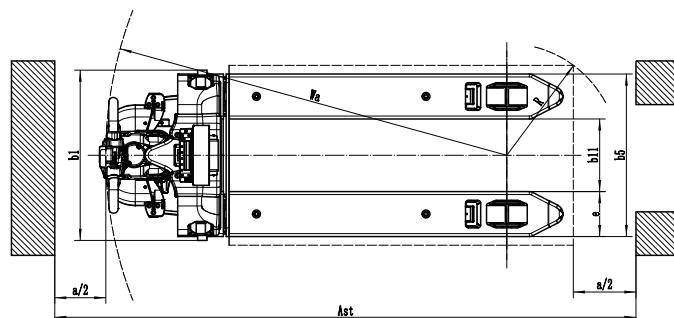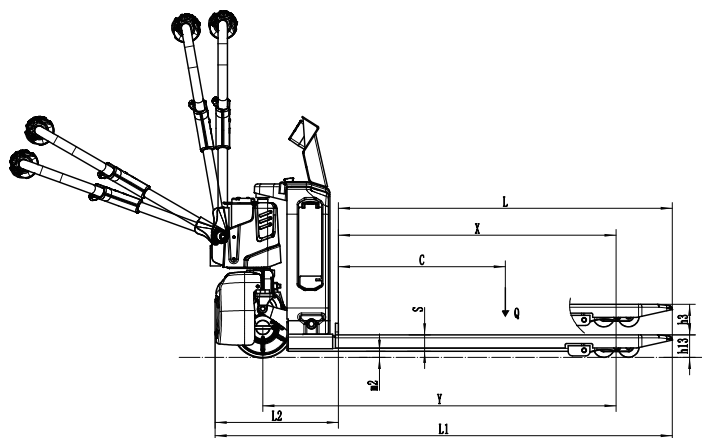

OPTION:

No.	Optional items	F4 with scale
1.1	Fork dimension	●1150*560○900*560○1000*560○1220*560○1350*560○900*685○1000*685 ○1150*685○1220*685○1350*685○1500*560 ○1500*685
1.3	Fork lowered height	●82
1.6	Drive cover off the ground	●55mm
2.1	Load wheel type	●Double○Single
2.2	Load wheel material	●PU
2.3	Drive wheel material	●PU
2.7	Battery capacity	●20AH*1○20AH*2
2.8	Charger	●24V-5A external charger○24V-10A external charger
2.9	Battery indicator	●Without hourmeter
2.16	Handle head type	●Hands small handle head
3.3	Castor wheels	●No○Yes and not customized
3.12	Buzzer	●Yes and not customized
3.16	Turtle speed	●Yes and not customized
3.21	Printer	●Without printer (RAVAS 1100 dysplay) ○ With printer (RAVAS 2100 display) (with printer)
4.8	Drive assembly	●Yes and not customized

Note: ●Standard ○ Optional - Inconformity

AT SHS, WE HELP COMPANIES MOVE GOODS SAFELY AND EFFICIENTLY BY DESIGNING, SUPPLYING, AND MAINTAINING MATERIALS HANDLING EQUIPMENT.