



## **DRIVERTRUK 30 Plug In**

**Product Code: LTEPEPL153150**

The Liftek DriverTruk 30 Plug In electric pallet truck, even more powerful than its predecessors, is the best of an already incredible range.

### **DRIVERTRUK 30 QUICK SPECS :**

**Weight = 120 kg / Capacity = 1500 kg :  
560 mm x 1150 mm - OTHER FORK SIZES AVAILABLE**

### **KEY FEATURES**

- ✓ **Smart Lithium Battery**
- ✓ **Now With Electric Lift**
- ✓ **Newly Designed Handle Head**
- ✓ **Turtle Speed for Upright Handling**
- ✓ **In-Built Charger**



**CALL US TODAY AND TALK TO OUR TEAM OF EXPERTS**

**0800 619 0800**

# DRIVERTRUK 30 Plug in


Product Code: LTEPEPL153150

Distinguishing mark	1.1	Manufacturer			Liftek
	1.2	Model designation			LTEPEPL153150
	1.3	Drive			Electric
	1.4	Operator type			Pedestrian
	1.5	Load capacity	Q	kg	1500
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	950 (880)
	1.9	Wheelbase	y	mm	1190 (1120)
Service weight	2.1	Service weight		kg	120
	2.2	Axle loading, laden front/rear		kg	480/1140
	2.3	Axle loading, unladen front/rear		kg	90/30
Tyres/chassis	3.1	Tyre type			Polyurethane
	3.2.1	Tyre size, front		mm	Φ210x70
	3.3.1	Tyre size, rear		mm	Φ80x60 (Φ74x88)
	3.4	Additional wheels (castor wheels)		mm	—
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x/4 (1x/2)
	3.6.1	Tread width, front	b10	mm	—
	3.7.1	Tread width, rear	b11	mm	410/(535)
Dimensions	4.4	Lift height	h3	mm	115
	4.9	Height of tiller handle in drive position min./max.	h14	mm	750/1190
	4.15	Lowered height	h13	mm	80
	4.19	Overall length	l1	mm	1540
	4.20	Length to face of forks	l2	mm	400
	4.21	Overall width	b1/b2	mm	560 (685)
	4.22	Fork dimensions	s/e/l	mm	50x150x1150
	4.25	Distance between fork-arms	b5	mm	560 (685)
	4.32	Ground clearance, center of wheelbase	m2	mm	30
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2145
	4.34.2	Aisle width for pallets 800×1200 crossways	Ast	mm	2050
Performance data	4.35	Turning radius	Wa	mm	1330
	5.1	Travel speed, laden/unladen		km/ h	4.5/5.0
	5.2	Lifting speed, laden/unladen		m/s	0.017/0.020
	5.3	Lowering speed, laden/unladen		m/s	0.09/0.06
	5.8	Max. gradeability, laden/unladen		%	6/16
	5.10	Service brake			Electromagnetic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	0.75
	6.2	Lift motor rating at S3 15%		kW	0.7
	6.4	Battery voltage/nominal capacity		V/Ah	24/20
	6.5	Battery weight		kg	7
Addition data	8.1	Type of drive control			DC
	10.5	Steering design			Mechanical
	10.7	Sound pressure level at the driver's ear		dB(A)	<74

If there are improvements of technical parameters or configurations, no further notice will be given.  
The diagram shown may contain non-standard configurations.

CALL US TODAY AND TALK TO OUR TEAM OF EXPERTS

**0800 619 0800**

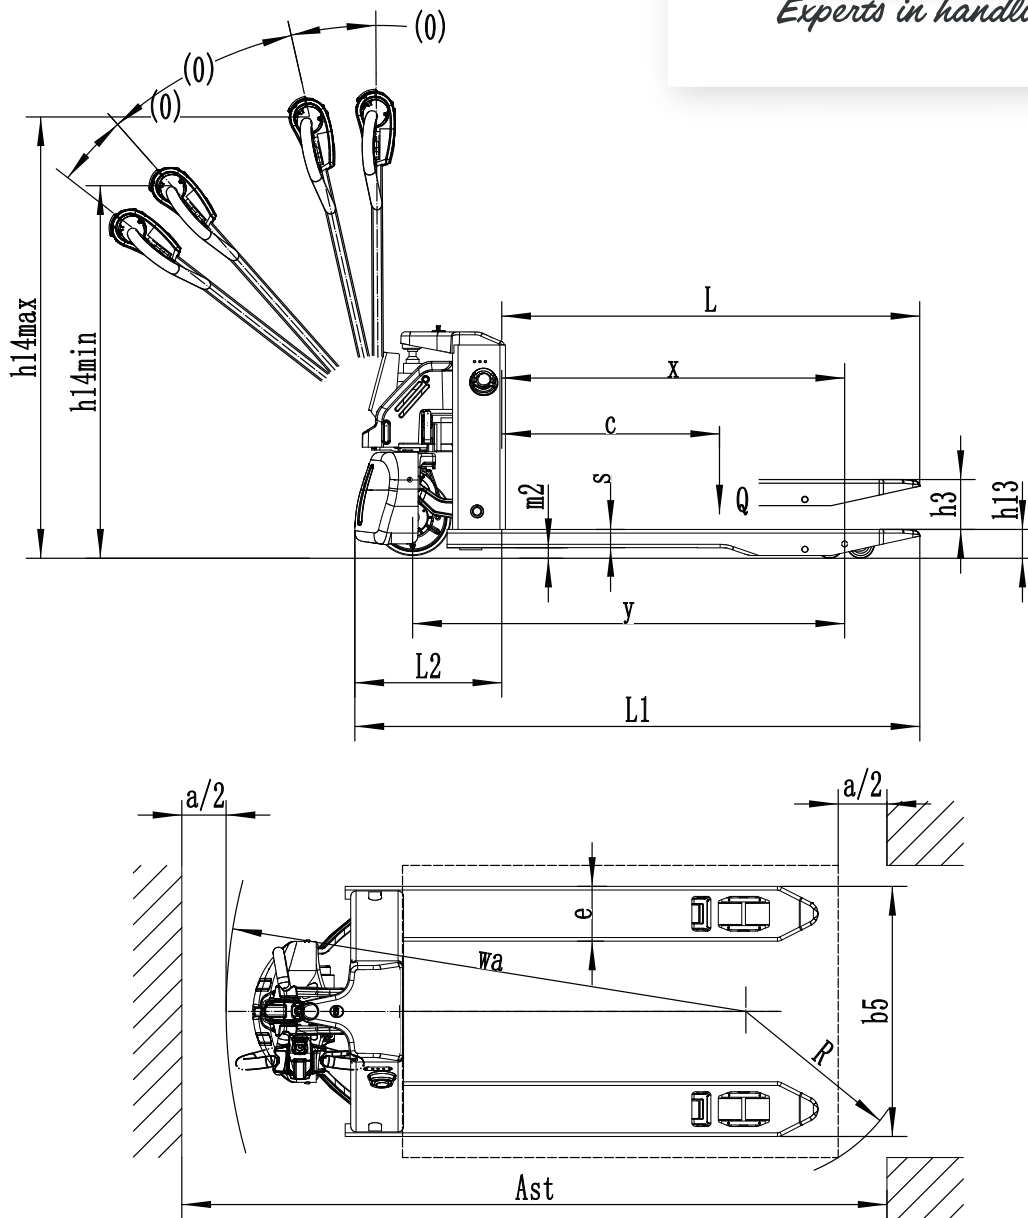

## Option:

No.	Optional items	LTEPEPL153150
1.1	Fork length	●1150/○900/○1000/○1220/○1500
1.2	Fork width	●560/○685
1.3	Fork lowered height	●80
2.1	Load wheel type	●Double/○Single
2.2	Load wheel material	●PU
2.3	Drive wheel material	●PU/○Trace PU
2.7	Battery capacity	●24V/20Ah
2.8	Charger	●24V Internal
3.3	Castor wheels	○
3.12	Hummer	●
3.16	Vertical handler working	●

Note: ● Standard ○ Optional - Inconformity

CALL US TODAY AND TALK TO OUR TEAM OF EXPERTS

**0800 619 0800**