

LIFTEK

DS3

ELECTRIC PEDESTRIAN
STACKER

1500 KG

PRODUCT CODE

25071



- ✓ Entry level stacker with great ease of use and high capacity
- ✓ Wide mast selection up to 3.9 meters elevation
- ✓ Stability for medium level stacking
- ✓ Integrated charger for charging convenience
- ✓ Maintenance free battery with Li-Ion technology

Manufacturer			Liftek®
Model designation			DS3
Drive			Electric
Load capacity	Q	kg	1500
Load center distance	c	mm	600
Service weight		kg	530
Length to face of forks	l2	mm	577
Overall width	b1/b2	mm	834
Fork dimensions	s×e×l	mm	75/170/1150
Turning radius	Wa	mm	1470
Max. gradeability, laden/unladen		%	3/10
Battery voltage/nominal capacity		V/Ah	24/80



ELECTRIC PEDESTRIAN STACKER 1500KG



DS3

Distinguishing mark	1.1	Manufacturer			Liftek®
	1.2	Model designation			DS3
	1.3	Drive			Electric
	1.4	Operator type			Pedestrian
	1.5	Load capacity	Q	kg	1500
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	802
	1.9	Wheelbase	y	mm	1210
	2.1	Service weight		kg	530
Service weight	2.2	Axle loading, laden front/rear		kg	625/1405
	2.3	Axle loading, unladen front/rear		kg	375/155
Tyres/chassis	3.1	Tyre type			Polyurethane
	3.2	Tyre size, front			Ø190×55
	3.3	Tyre size, rear			Ø74×88
	3.4	Additional wheels (castor wheels)		mm	Ø125×50
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x, 1/2
	3.6.1	Tread width, front	b ₁₀	mm	602
	3.7.1	Tread width, rear	b ₁₁	mm	420
Dimensions	4.0	Max. Lift Height	H	mm	3018
	4.2	Retracted mast height	h ₁	mm	2067
	4.4	Lift height	h ₃	mm	2930
	4.5	Height, mast extended	h ₄	mm	3532
	4.9	Height of tiller handle in drive position min./max.	h ₁₄	mm	760/1140
	4.15	Lowered height	h ₁₃	mm	90
	4.19	Overall length	l ₁	mm	1727
	4.20	Length to face of forks	l ₂	mm	577
	4.21	Overall width	b ₁ /b ₂	mm	834
	4.22	Fork dimensions	s×e×l	mm	75/170/1150
	4.24	Fork carriage width	b ₃	mm	680
	4.25	Fork spread	b ₅	mm	570
	4.32	Ground clearance, center of wheelbase	m ₂	mm	13
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2302
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	2235
Performance data	4.35	Turning radius	Wa	mm	1470
	5.1	Travel speed, laden/unladen		km/h	4.0/4.5
	5.2	Lifting speed, laden/unladen		m/s	0.085/0.13
	5.3	Lowering speed, laden/unladen		m/s	0.105/0.085
	5.8	Max. gradeability, laden/unladen		%	3/10
	5.10	Service brake			Electromagnetic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	0.75
	6.2	Lift motor rating at S3 15%		kW	2.2
	6.4	Battery voltage/nominal capacity		V/Ah	24/80
	6.5	Battery weight		kg	39
Drive/lift mechanism	8.1	Type of drive control			DC
Addition data	10.5	Steering design			Mechanical
	10.7	Sound pressure level at the driver's ear		dB(A)	74
	15.1	Charger output current		A	10



ELECTRIC PEDESTRIAN STACKER 1500KG

DS3

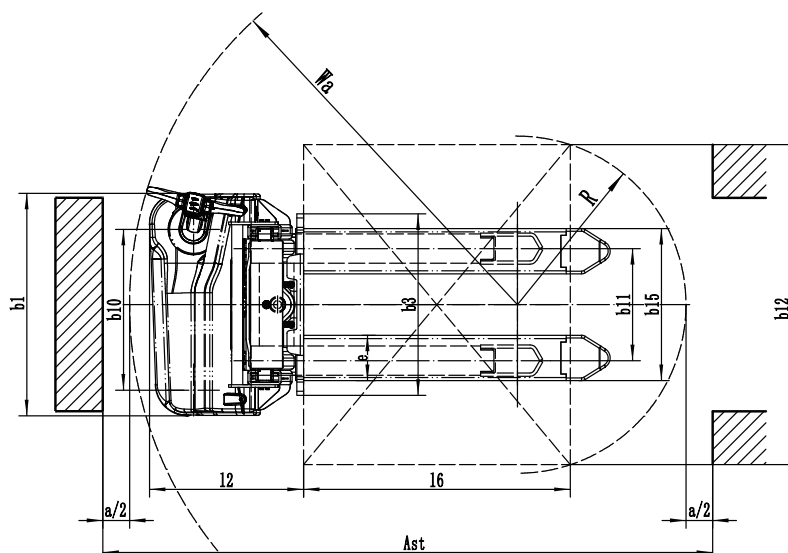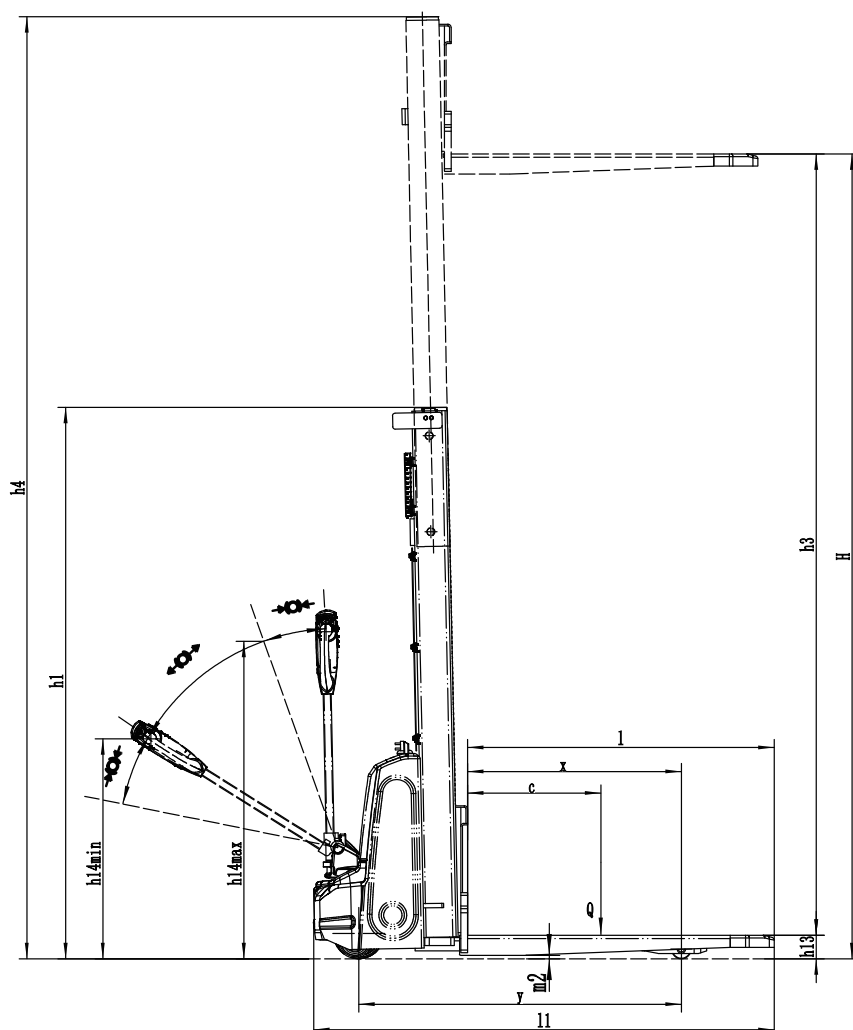



MAST OPTION:

Mast types	Lift height h3+h13	Height, mast lowered h1	Free lift h2	Height, mast extended h4
	mm	mm	mm	mm
2-Standard Mast	2518	1817	---	3032
	2718	1917	---	3232
	3018	2067	---	3532
	3318	2217	---	3832
	3618	2367	---	4132
	3918	2517	---	4432



OPTION:

Optional items	DS3
Fork dimension	●570*1150○685*1150 ○570*1000○685*1000 ○570*1220○685*1220
Fork lowered height	●90
Fork carriage width	●680mm○795mm
Load wheel type	●Single
Load wheel material	●Polyurethane
Drive wheel material	●Polyurethane
Battery capacity	●80Ah (Lead acid)○40Ah (Li-ion)
Charger	●24V-10A internal (Lead acid)○24V-15A internal (Li-ion)
Battery indicator	○Without hourmeter
Castor wheels	●Yes and not customized
Vertical tiller creep speed	●Yes and not customized
Speed reduction with elevated mast	●Yes and not customized
Note : ●Standard ○ Optional - Inconformity	

AT SHS, WE HELP COMPANIES MOVE GOODS **SAFELY** AND **EFFICIENTLY** BY **DESIGNING, SUPPLYING, AND MAINTAINING** MATERIALS HANDLING EQUIPMENT.

